





DS INSTRUMENTS

WWW.DSINSTRUMENTS.COM

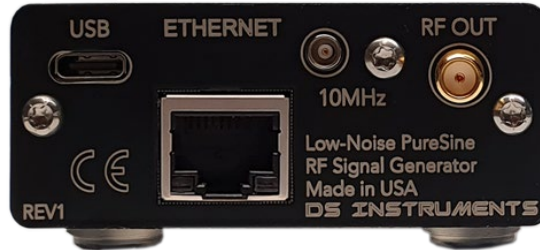

WARNING

The microwave output port must always be **terminated** when the RFO is enabled! An open port will cause damage to the final amplifier stage as a result of constructive interference from the reflected signal.

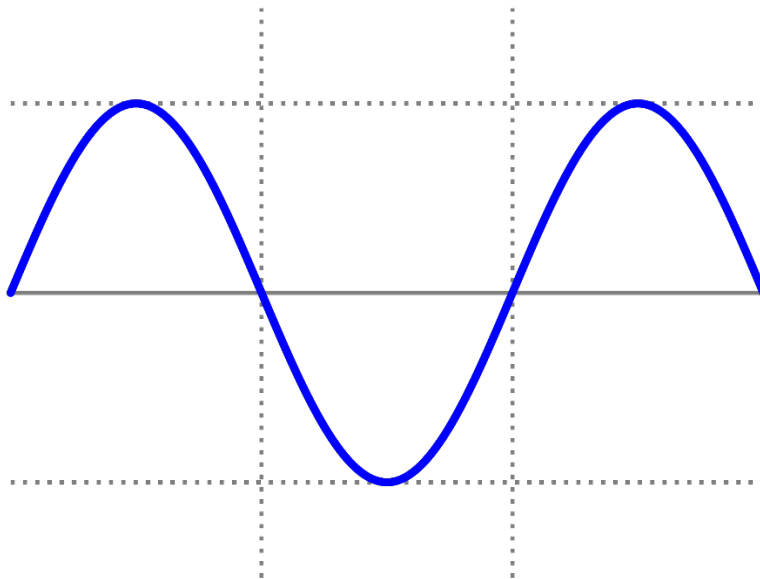

MADE IN

U. S. A.

Please contact us if you have any questions!

support@dsinstruments.com

ENGINEERED IN

NEVADA